








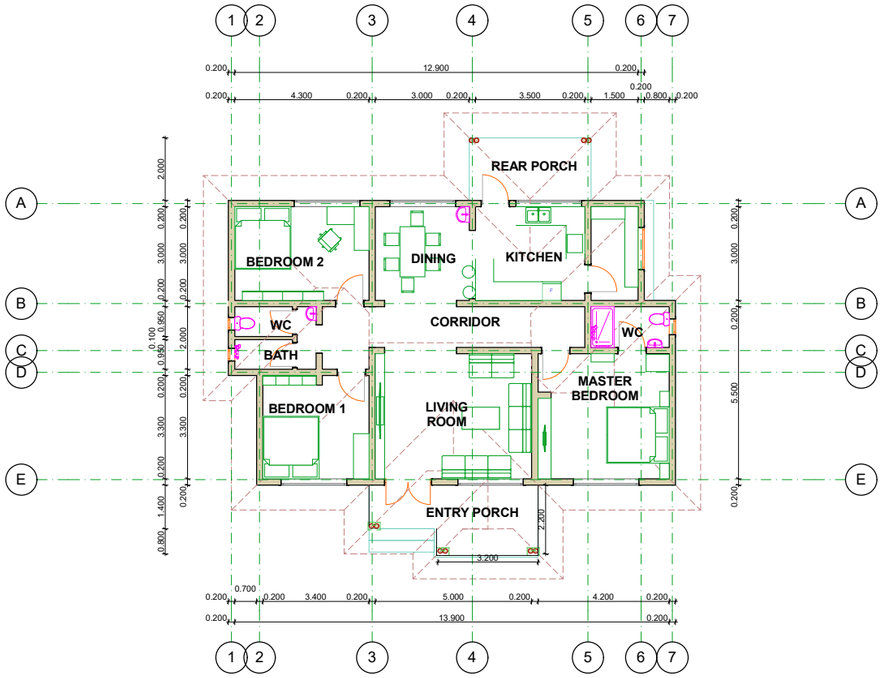

EAST ELEVATION

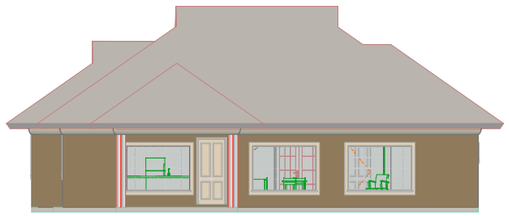


NORTH ELEVATION

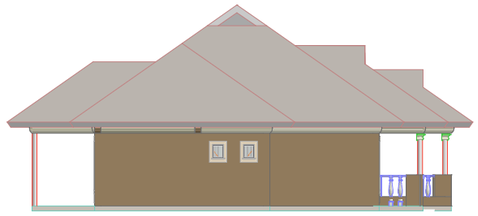


WEST ELEVATION




SOUTH ELEVATION

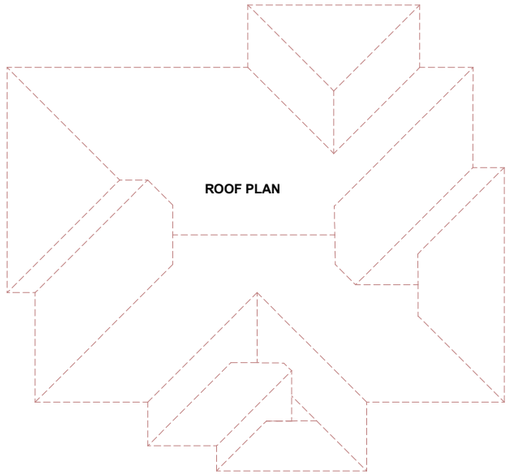





septic tank specifications



Manhole specifications

ROOF NOTES.
100 by 50mm Trusses
100 by 50mm wallplate
calotex ceiling 0m 75 by 50mm
brandering 225 by 25mm Fascia board
30 to 45 roof pitch

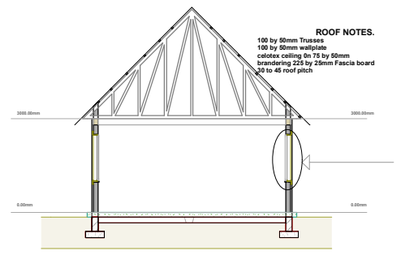



WINDOW DETAILS

FOUNDATION NOTES.
Foundation on 150mm conc. slab on 1000G polythene
sheet DPM on 50mm murram blinding on 300mm H/C fill.
600 by 200mm conc. in strip.

DOOR SCHEDULE

Location	Width
Main Entrance	1500 mm
Bedrooms	900 mm
Kitchen Rear Exit	900 mm
Store	800 mm
Bathrooms	800 mm
WC	750 mm

WINDOW SCHEDULE

Location	Size
Living Room	1800 × 1500 mm
Dining	2100 × 1500 mm
Kitchen	1800 × 1200 mm
Bedrooms	1800 × 1500 mm
Bathrooms	600 × 600 mm

THE DRAWINGS
COPYRIGHT OF THE AUTHOR
IT IS ILLEGAL TO USE THE DRAWING FOR PURPOSES OF CONSTRUCTION OR TO REPRODUCE IT IN INART OR IN WHOLE WITHOUT THE AUTHOR'S PRIOR CONSENT

NOTES

1. All measurements are shown in millimeters. Drawings not to be scaled. Only figured dimensions to be used.
2.The contractor must check and verify all dimensions on site before commencement of work. Any discrepancies must be notified immediately to the architect and clarified.
CONSTRUCTION
3.Damp proof course must be provided under all external walls at grade. DPC to be min. 150mm above GL.
4.All slab at grade to be poured on 1000 Gauge polythene on 50mm stone dust blinding on hardcore.
5.All soil under slab and around external foundations to be poisoned for anti-termite control.
6. window sills must be finished before internal plastering.
STRUCTURAL
7. All RC work to structural engineer's details.
8.Depth of foundation to be determined on site to S.E approval
9.All walls shall be 150mm thick unless otherwise shown
10.All walls shall be reinforced with approved hoop iron at every alternate course.
MECHANICAL
11.Drain pipes passed beneath buildings and driveways to be encased in 150mm concrete surround.
12.All mechanical work must be coordinated with electrical work. Any conflicts must be clarified before works begin.
13.Minimum slopes in drain pipes shall be 1%.
14.All testing of pipes must be completed before plastering.
ELECTRICAL
15. All conduits must be laid before plastering.
16.All electrical work must be coordinated with electrical works.

Revision History

Rev/ID	ChID	Change Name	Date

Company Title

ARCHBARN

PROPOSED 3 BEDROOM HOUSE PLAN

SHEET TITTLE
FLOOR PLAN, ELEVATION,SECTION

SCALE
1:100

SHEET NO **A.01**

DESIGNED BY **A.B**

DESIGNED BY **A.B**